




SKIOLD PADDLE MIXER

PTS2000/PTS4000/PTS5000/PTS6000

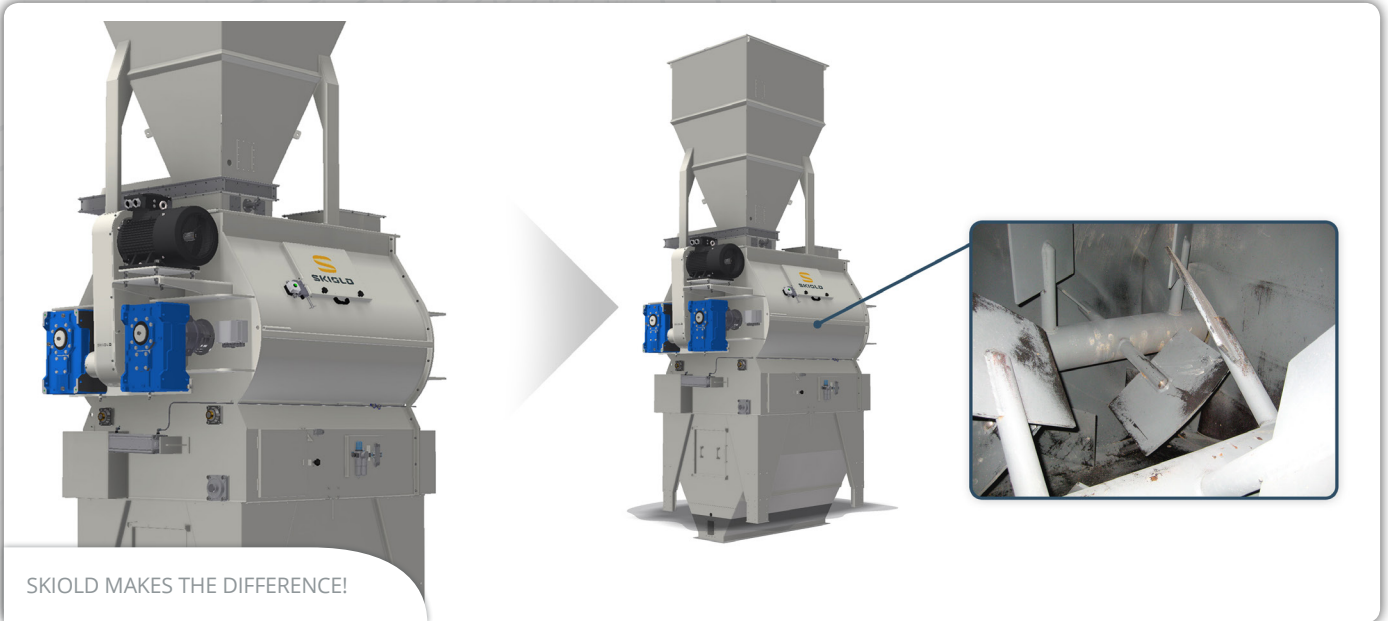

SKIOLD MAKES THE DIFFERENCE!

SKIOLD DOUBLE SHAFT PADDLE MIXER

For mixing of compound feed and feed ingredients

Double gear box drive

Heavy duty industrial execution

Quick filling and emptying

Available with pre-bin and discharge bin

Fully emptying through "bomb doors"

Addition of up to 3 different liquids

Mixing time and accuracy verified by MTSE, Germany

SKIOLD PADDLEMIXER PTS2000/4000/5000/6000

TECHNICAL SPECIFICATIONS

	PTS2000	PTS4000	PTS5000	PTS6000
Mixing capacity (t/h):	15	30	37,5	45
Batch size (litres):	2000	4000	5000	6000
Batch size (kg):	1000	2000	2500	3000
Batch time (minutes):	1 - 3	1 - 3	1 - 3	1 - 3
Mixing time, dry ingredients (minutes):	< 1	< 1	< 1	< 1
Mixing time, liquid ingredients < 3% (minutes):	< 2	< 2	< 2	< 2
Mixing accuracy:	1:100000	1:100000	1:100000	1:100000
Mixing auger (rpm):	28	24	24	25
Motor size (kW):	22	37	37	45
Door operation:	Pneumatic	Pneumatic	Pneumatic	Pneumatic
Empty weight mixer (kg):	4000	5800	7000	8650
Empty weight prebin incl. slide (kg):	605	955	1055	1550
Empty weight postbin (kg):	750	890	990	1100

DIMENSIONS IN MM

	PTS2000	PTS4000	PTS5000	PTS6000
A	5729	6567	7073	7018
B	994	1120	1120	1120
C	2003	2279	2279	2405
D	2732	3171	3671	3493
E	2030	2285	2286	2561
F	2767	3399	3945	4126

